


TTARTISAN

M01

Camera Flash

Mini Size, Film Design

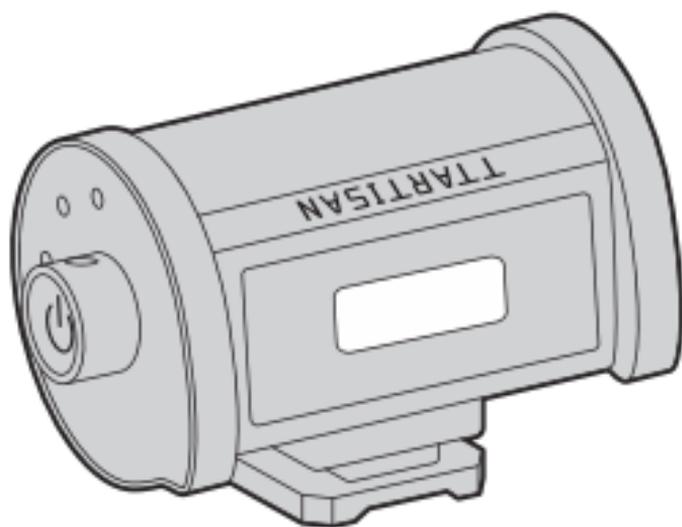

User Manual

Please Read this Manual Carefully Before Use

Specifications

Model	M01
Light Type	Xenon Flash
Color Temperature	5600K+200K
Guide Number (GN)	GN12
Power Levels & Recycle Time	1/8:Continuous, 1/4:2s, 1/2:3s, 1/1:4s
Sync Speed	1/250s(Max)
Sync Trigger	Hot Shoe /Wireless Trigger
Flash Count	Average power approx. 800 flashes
Built-in Lithium Battery	3.7v, 350mAh
Charging Method	Type-C Charging
Size & Weight	Φ30*48mm,35g
<p>Compatible Cameras:</p> <p>Fujifilm, Nikon, Sony, Canon, Pentax, Olympus, Leica, Ricoh, and other cameras with a hot shoe mount.</p> <p>Note: Not compatible with cameras lacking a hot shoe mount, such as the Panasonic S9 and older film cameras.</p>	




Functions

Power Level
Indicator

ON/OFF

Hot Shoe Mount

Includes 1 Cold Shoe
Adapter with 1/4" Thread
for Use with Mounting Brackets

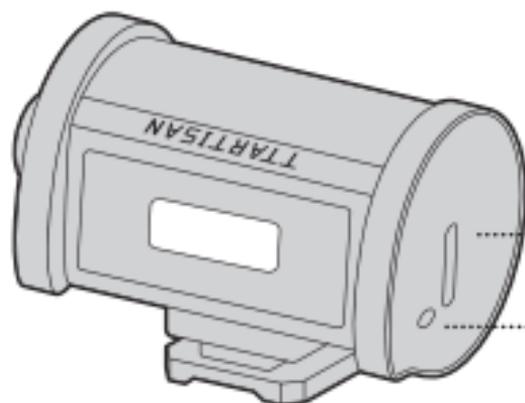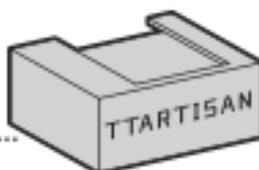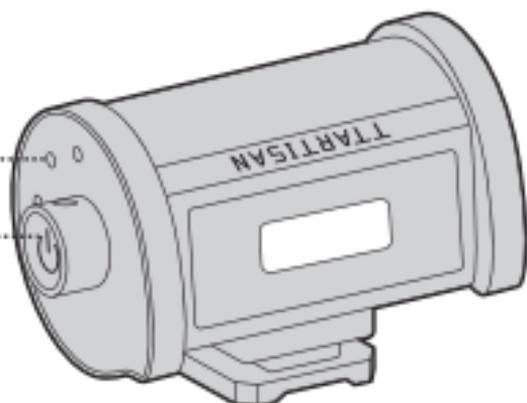


..... Type-C Charging Port

..... Charging Indicator

Usage Modes

On-Camera Flash:

The TtArtisan Flash (M01) comes with a hot shoe mount and is compatible with cameras that have a hot shoe contact.

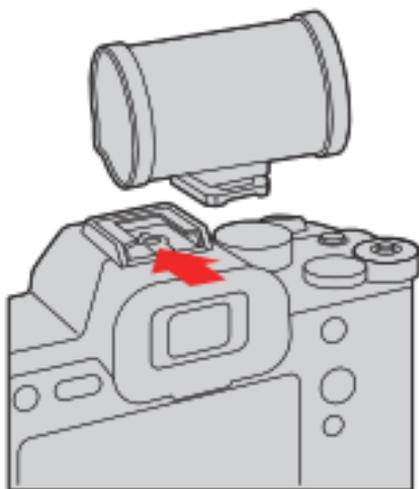

Off-Camera Flash:

The TtArtisan Flash (M01) uses a dedicated signal channel and works with the TtArtisan Wireless Trigger (J01) for off-camera flashing within a 3m range.



Instructions

Power On/Off:

Press and hold the power button for 1–2 seconds until the power level indicator lights up to turn on.

Press and hold the power button for 1–2 seconds until the power level indicator turns off to power down.

Auto Power-Off:


The unit will automatically power off after one hour of inactivity (no triggering, test flash, or level adjustment).

Brightness Adjustment:

Four brightness levels are available. Each additional lit indicator represents a higher brightness level.

Example: 3 indicators lit = 1/2 power level.

Short-press the power button during operation to cycle through levels:

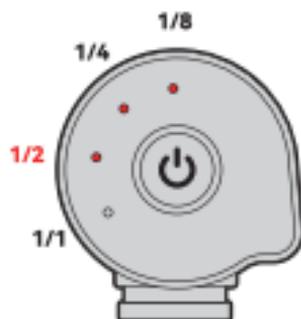

Recycle Indicator:

The TtArtisan Flash (M01) uses the power level indicator to show the recycling status.

When the indicator is blinking, the flash is recycling and cannot be used.

Once the indicator stops blinking, recycling is complete, and the flash is ready for use.

Precautions

Keep the product dry and store it in a cool, dry place.

Keep out of reach of children.

Do not point the flash directly at human eyes, as it may cause temporary visual impairment.

Certain designs of cameras, lenses, and accessories may conflict with the installation and use of the flash.

This product contains a built-in lithium battery and other precision electronics. Do not disassemble it yourself. If the product malfunctions, please contact our customer service team.

This product has a one-year warranty from the date of purchase. The following conditions are not covered by our warranty service:

1. Counterfeiting and prevention of the company's products.
2. Accidental or man-made damage, water, bump, etc.
3. Unable to provide documents, order number and other proof of purchase.
4. Beyond the warranty period.

Warranty Card

Purchase date

Purchase channels

Problem description

.....

.....

.....

Contact info

Return address

J01 Camera Flash



Video



J01 Camera Flash Instruction Video
Scan QR code to Watch

**For more details
Please visit our official website**

www.ttratisan.com